REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden. to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Ar/Ination, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

Davis Highway, Suite 1204, Arlington, VA 22202-4302,	and to the Office of Management and Bu	dget, Paperwork Reduction Pro	ject (0704-0188), Washington, DC 20503.
1. AGENCY USE ONLY (Leave blank)	2. report date 12 Mar 98	3. REPORT TYPE AN Final, 01 Aug	d dates covered 395 - 31 Dec 97
4. TITLE AND SUBTITLE			5. FUNDING NUMBERS
Instrumentation for Processing and Characterization		F49620-95-1-0476	
of Nano-Modulated Ceramics			
6. AUTHOR(S)			
Vladimir N. Litvinenko			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)		AFRL-SR-BL-TR-98-
Free Electron Laser Laboratory			(A) (C) (Y)
Physics Department, Box 90319			0095
Duke University			
Durham, NC 27708-0319			
9. SPONSORING/MONITORING AGENCY Air Force Office of Scientific Re			10. SPONSORING / MONITORING AGENCY REPORT NUMBER
Dr. Alexander Pechenik, Program		\ <u>\</u>	
AFOSR/NA	_	nH	
110 Duncan Avenue, Suite B115	5	1011	
Bolling AFB, DC 20332-0001			
DURIP Broad Agency Announce	ement RAA 95-2		
DOM Broad rigolog runounc	onione, Dru 1932		
12a. DISTRIBUTION / AVAILABILITY STAT	EMENT		12b. DISTRIBUTION CODE
Apployed for public	mo lango		
distribution that	·		
13. ABSTRACT (Maximum 200 words)			
This grant was sponsored by the	FY95 Defense University	Research Instrum	entation Program (DURIP). The
			ersity Free Electron Laser (FEL)
Laboratory light sources in the	infrared (IR), ultra-viol	et (UV), extreme	ultra-violet (XUV), X-Ray and
gamma-ray wavelength regions,	that would support the r	esearch and charac	cterization of advanced materials,
including nano-modulated coating	ngs and ceramics. This r	report summarizes	progress made with the existing
FEL Laboratory light sources as	nd describes three major p	pieces of equipmer	nt fabricated with funds from this
			ch. Capabilities of the resulting
equipment and experiments plan	ned in the near-term are a	lso described.	

19980410 058

14. SUBJECT TERMS laser, free electron laser, F seeker windows, wear, co	15. NUMBER OF PAGES 10 16. PRICE CODE		
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to stay within the lines to meet optical scanning requirements.

- Block 1. Agency Use Only (Leave blank).
- Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.
- Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 30 Jun 88).
- Block 4. <u>Title and Subtitle</u>. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.
- Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract PR - Project
G - Grant TA - Task
Mill Mortel

PE - Program WU - Work Unit Element Accession No.

- **Block 6.** <u>Author(s)</u>. Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).
- **Block 7.** <u>Performing Organization Name(s) and Address(es)</u>. Self-explanatory.
- **Block 8.** <u>Performing Organization Report</u> <u>Number</u>. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.
- Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.
- Block 10. Sponsoring/Monitoring Agency Report Number. (If known)
- Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in.... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. <u>Distribution/Availability Statement</u>. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."

DOE - See authorities.

NASA - See Handbook NHB 2200.2.

NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.

DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.

NASA - Leave blank. NTIS - Leave blank.

- Block 13. Abstract. Include a brief (Maximum 200 words) factual summary of the most significant information contained in the report.
- **Block 14.** <u>Subject Terms</u>. Keywords or phrases identifying major subjects in the report.
- **Block 15.** <u>Number of Pages</u>. Enter the total number of pages.
- **Block 16.** Price Code. Enter appropriate price code (NTIS only).
- Blocks 17. 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.
- Block 20. <u>Limitation of Abstract</u>. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

Instrumentation for Processing and Characterization of Nano-Modulated Ceramics

Final Technical Report

AFOSR Grant No. F49620-95-1-0476

Principal Investigator:

Professor Vladimir N. Litvinenko

March 12, 1998

Period of Performance:

August 01, 1995 - December 31, 1997

Free Electron Laser Laboratory

Department of Physics

Duke University

Box 90319

Durham, NC 27708-0319

Instrumentation for Processing and Characterization of Nano-Modulated Ceramics

Vladimir N. Litvinenko, FEL Laboratory, Duke University

ABSTRACT

This grant was sponsored by the FY95 Defense University Research Instrumentation Program (DURIP). The objective was to acquire instrumentation compatible with the Duke University Free Electron Laser (FEL) Laboratory light sources in the infrared (IR), ultra-violet (UV), extreme ultra-violet (XUV), X-Ray and gamma-ray wavelength regions, that would support the research and characterization of advanced materials, including nano-modulated coatings and ceramics. This report summarizes progress made with the existing FEL Laboratory light sources and describes three major pieces of equipment fabricated with funds from this program for application to nano-modulated coatings and ceramics research. Capabilities of the resulting equipment and experiments planned in the near-term are also described.

BACKGROUND

This report documents the results of a grant received by Duke University from the FY95 Defense University Research Instrumentation Program (DURIP) for the acquisition of *Instrumentation for Processing and Characterization of Nano-Modulated Ceramics*. This grant, amounting to \$299,000, was administered by the Air Force Office of Scientific Research (AFOSR); Dr. Alexander Pechenik served as AFOSR's Program Manager.

DEPARTMENT OF DEFENSE AREAS OF INTEREST

The instrumentation proposed for this grant was aimed at establishment of new research capabilities to the following Department of Defense (DoD) areas of interest (Section VII of the BAA 95-2):

 Processing and characterization of the nano-modulated oxide coatings with the scale of compositional layers ranging from a few nanometers to a few microns;

- Characterization of oxide coating hardness, toughness and resistance to wear and corrosion;
- Characterization of HfO₂ coatings as a promising candidate for protection of aircraft canopies and seeker windows; and
- Time-resolved in-situ characterization of optical properties of evolving nano-scale metal and oxide structures.

DUKE STORAGE RING LIGHT SOURCE CAPABILITIES

The capabilities for supporting the proposed research have improved substantially since submission of the proposal for this program and in parallel with the execution of this grant. These improvements were funded mostly by other DoD programs (U. S. Office of Naval Research Grant No. N00014-94-1-0818, "A Center for Fundamental Surgical, Structural, Photochemical, and Spectroscopic Studies using IR, UV, and X-ray Free Electron Lasers"; and Air Force Office of Scientific Research Grant No. F49620-93-1-0590, "Research on the Physics of Ultra-High Brightness, Ultra-Relativistic Electron Beams").

The Duke storage ring operates in the 0.25 GeV - 1.1 GeV energy range with maximum stored current of 150 mA [1]. Installation and commissioning of the OK-4 FEL system was completed in November 1995. The OK-4 FEL can produce tunable spontaneous radiation from 120 nm to 600 nm. Since November 1996, the OK-4 FEL has produced high power coherent radiation in UV range from 345 to 413 nm, as well as beams of gamma-rays with tunable energy from 3 MeV to 16 MeV [2, 3]. In very near future, the OK-4 FEL will be configured to produce laser energy in deep UV range (down to 190 nm). These capabilities are sufficient for initial characterization of optical properties of nano-coatings under study.

PROGRESS

Instrumentation was acquired and fabricated for application of the existing and evolving Duke University Free Electron Laser Laboratory (FEL) storage ring light sources to studies of nano-structures and nano-ceramics. The list of equipment included: a vacuum chamber and deposition system; in-situ interferometry, holography and reflectometry equipment; and real-time data acquisition equipment.

Most of proposed equipment has been assembled and tested. The remainder of the standard equipment has been ordered and will be assembled in April, 1998. Full capabilities of the system will be established by the Summer of 1998 and first experiments with nano-structures will start by that time.

The following sections summarize the progress made with acquisition, assembly and test of the equipment.

VACUUM CHAMBER AND DEPOSITION SYSTEM

The vacuum chamber and deposition system includes a multi-port ultra-high vacuum chamber/deposition assembly, an ultra-high vacuum pump-cart, and interface assemblies as needed to support specific experiments.

The multi-port ultra-high vacuum assembly provides the necessary elements for processing and characterizing nano-modulated coatings. A photograph is shown in Fig.1. This assembly is equipped with five optical ports, a port for the deposition system, a port for the ultra-high vacuum pump, and five ports for vacuum pumping, gas controllers and vacuum gauges. Currently, CaF_2 windows are installed for optical transparency down to VUV (120 nm). The

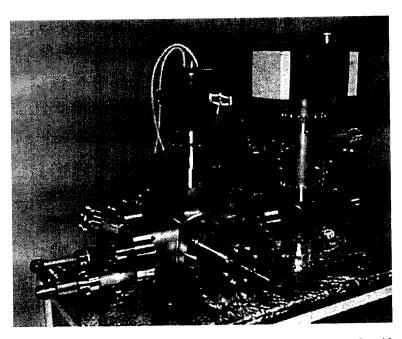


Figure 1. Photograph of the multi-port ultra-high vacuum chamber/deposition assembly for processing and characterization of nano-modulated coatings.

apparatus includes screens to protect windows and other essential parts of the equipment during the process of coating. The assembly has been built and is currently undergoing tests; so far, it has demonstrated ability to hold a very high vacuum (10⁻¹⁰ torr range).

The ultra-high vacuum pump-cart has been completed and provides in-situ pumping of the vacuum chamber/deposition assembly. The pump-cart, partially funded by this grant, is shown in Fig.2. The cart incorporates an oil-free turbo-pump, a dry piston pump, and a residual gas analyzer. The residual gas analyzer, together with tanks for gasses such as nitrogen, oxygen and argon, will control and monitor the atmospheric environment during both coating deposition and characterization tests.

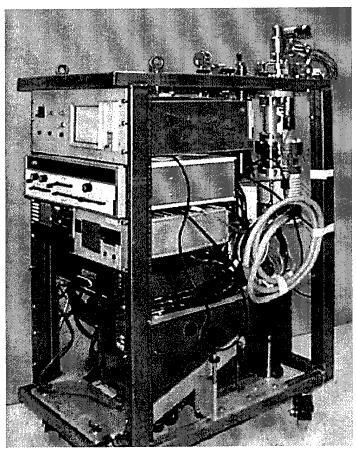


Figure.2. Photograph of the oil-free ultra-high vacuum pump-cart for in-situ control of the multi-port vacuum chamber/deposition assembly.

Finally, a small portion of funds from this grant has provided an ultra-high vacuum interface for connecting the above equipment to the storage ring light sources.

IN-SITU INTERFEROMETRY, HOLOGRAPHY AND REFLECTROMETRY EQUIPMENT

The equipment for the laser interferometry and reflectometry includes a set of conventional lasers and a set of time-resolved, phase sensitive electronics. In addition to conventional lasers, we have developed a new method utilizing spontaneous radiation from the OK-4 for real-time reflectometry. The equipment purchased for laser reflectometry (lock-in amplifiers, detection system, net-work analyzer) has been utilized for this novel method. This method of reflectivity measurement uses tunable OK-4 radiation and, therefore, provides for full coverage of the spectral range. A conventional nitrogen laser purchased on this grant and existing helium-neon lasers will be used for holography, standard tests of the samples, and for alignment of the optical elements for nano-ceramics experiments.

REAL-TIME DATA ACQUISITION EQUIPMENT

The real time data acquisition system is fully computer controlled and incorporated into the Duke storage ring. It is comprised of two computers connected via Ethernet with the main control room, a 4-Ghz LeCroy oscilloscope, two CAMAC crates with real time data acquisition hardware, and controllers located in two racks. All real time data acquisition system is connected by comprehensive cable net-work and is fully operational. The control system of the nanoceramics experiments includes a set of computer controlled stepper-motor drivers. The piezo drivers are utilized for components requiring high precision of alignment.

At the present time, in-situ detection for XUV radiation utilizes two monochrometers (funded by other grants) and a number of time-resolved detectors. Additionally, a UV streak-camera (funded by other grants) will be available after April, 1998.

INTEGRATED NANO-CERAMICS RESEARCH SYSTEM

The full nano-ceramics research system will be located at the optical table in South-East optical room of the Duke FEL Laboratory (see Fig.3). A set of two optical tables, three breadboards and set of supporting equipment (tables, holders, mirrors, lenses, diaphragms, etc.) are used to support the equipment for characterization of nano-ceramics. All the equipment for reflectometry and transparency measurements is in place and operational. The temperature

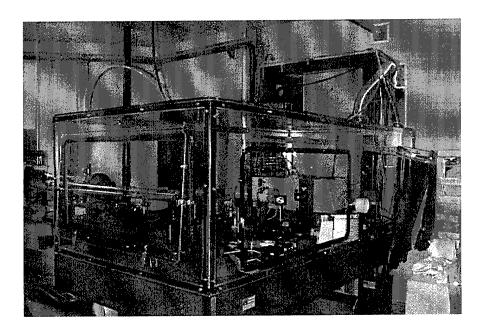


Figure 3. The view for the South-East optical room where the integrated nano-ceramics research system is being situated.

sensors have been delivered and tested. The interferometer will be assembled in situ when the vacuum apparatus passes all tests. The differential pumping section has been designed, purchased and is in the process of assembly.

The OK-4 FEL spontaneous and coherent radiation as well as gamma-ray beams are delivered to this room by an ultra-high vacuum beam-line. The OK-4 FEL diagnostics and the real-time data acquisition system are located in this room. In addition, the photo-emission electron microscope (PEEM) with nm-range resolution (supported by the ONR Grant) is located in the same room. It provides for very unique and additional capabilities for studies of the nano-structures.

PROGRESS IN PROCESSING AND CHARACTERIZATION OF NANO-MODULATED OXIDE COATINGS

We have a number of substrates in hand for testing nano-modulated coatings. In the absence of the multi-port ultra-high vacuum system during 1996-1997, we used existing vacuum system of the OK-4 FEL to study multi-layer nano-scale coatings. Our studies confirmed our expectations that in vacuum conditions and in the presence of high intensity XUV radiation, a

layer of HfO₂ coating protects nano-coatings from optical damage. We plan to confirm this result in the presence of controlled atmospheres using the new apparatus.

CONCLUSION

The most essential parts of the Instrumentation for Processing and Characterization of Nano-Modulated Ceramics have been built and tested. A few remaining pieces of standard electronic and vacuum equipment will be delivered to Duke FEL laboratory very shortly. The apparatus required for the proposed research will be ready for the use by Summer of 1998. Thanks to an extension of the Grant period, we were able to use the available budget for most important and essential elements of the system, avoiding duplication with equipment supported by other grants and contracts. As the result, we have system capabilities that reach far beyond our expectations.

In combination with the rest of the OK-4 FEL equipment and its user station, the new system will allow the study of new nano-structures and nano-ceramics such as wide-gap semiconductors and quantum dots. It is apparent that the presence of the PEEM apparatus next to the new nano-ceramic apparatus provides us with capabilities to study electronic phenomena of subnano-scale layers.

In near future we will start to use new apparatus for test of stability of aluminum nanolayers in the ultra-high vacuum environment and high intensity of XUV radiation. We will also continue to study of the radiation stability of multi-layer nano-scale oxide coatings with and without HfO₂ protective nano-layer. We will use new apparatus for these studies.

In combination with available high power OK-4 UV radiation and desirable mixture of gases (oxygen, nitrogen, CO, etc.) the new apparatus will imitate the extreme conditions for aircraft canopies and seeker windows at high altitudes. This experiment can be initiated during 1998, provided that samples of materials used for aircraft canopies and seeker windows and information of the gas mixture typical for high altitudes can be made available to the Duke FEL Laboratory.

REFERENCES

- [1] Y. Wu, et al., "Performance and Operation Modes of the Duke FEL Storage Ring", IEEE Transactions on Nuclear Sciences, V.44, No.5, October 1997
- [2] V. N. Litvinenko, et al., "First UV/Visible Lasing with the OK-4/Duke Storage Ring FEL Design and Initial Performance", SPIE Vol. 2988 (1997), pp.188-199
- [3] V. N. Litvinenko, et al., "Gamma-Ray Production in a Storage Ring Free-Electron Laser", Physical Review Letters, V.78, N.24, 16 June 1997, pp.4569-4572